


4-Port 2.5G and 2-Port 10G SFP+ Ethernet Switch

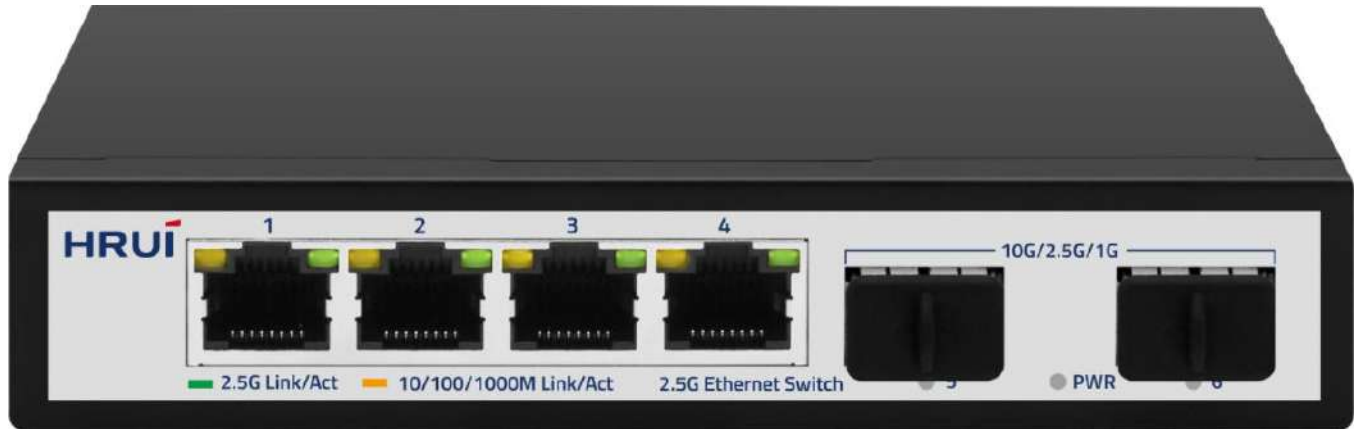

Product Highlights

- 4 *100M/1000M/2.5G RJ45 ports+2* 10G SFP+ port
- Complies with IEEE 802.3, IEEE 802.3u, IEEE 802.3ab, IEEE 802.3bz, IEEE 802.3z, IEEE 802.3ae, and IEEE 802.3x standards
- RJ45 port supports 100M/1G/2.5G adaptive
- Supports automatic port flipping (Auto MDI/MDIX)
- The panel indicator LED will monitor the working status and assist in fault analysis
- Flow control method, IEEE802.3x standard for full duplex and Backpressure standard for half duplex

Hardware Features

Description	Specification
Model	HR-SWTG024AS
Interface	4 * 2.5G RJ45 port 2 * 10G SFP+ port
Port Standard	IEEE802.3 (Ethernet) IEEE802.3u (Fast Ethernet) IEEE802.3ab (Gigabit Ethernet) IEEE802.3z (Gigabit Ethernet Fiber Standard) IEEE802.3bz (2.5G Ethernet) IEEE 802.3ae (10G Ethernet) IEEE802.3x (Flow Control)
Bandwidth	60Gbps
Packet Forwarding Rate	44.64Mpps
Packet Buffer	8Mbit
MAC Address Table	4K
Jumbo Frame	12K
Catstick	Nokia G-010S-A; Alcatel G-010S-P; Huawei MA5671A
Transmission Method	Store and Forward
Power Supply	AC 100-240V , 50/60Hz DC 12V 1A
Mainboard Power Consumption	5.92W
Structure Information	Product Dimensions :140*93*28mm Packaging Dimensions : 203*160*55mm Product Net Weight: 0.33KG Product Gross Weight:0.46KG
Packing Information	Carton Dimensions :580*335*445mm Packing Quantity: 40PCS Packing Weight: 19.5KG
Package Contents	Switch 1pcs, power adapter 1pcs, manual 1pcs,certificate of qualification 1pcs
Fan Quantity	0
Installation	Desktop
Surge Protection	Port Surge:Common mode 4KV, differential mode 2KV (Class C) Electrostatic ESD: Air 8KV, Contact 6KV (Class C)
Operating Temperature	0~40℃
Storage Temperature	-40℃ to 70℃
Operation Humidity	10%~90%,non condensing
Storage Humidity	5%~95%,non condensing

Hardware Features

Description	Specification
PWR Green LED	On: Powered on Off: Powered off
1-4	Green LED On: 2.5G Link normal Yellow LED On: 10M/100M/1G Link normal Off: Link blocked Flashing: Data transmitting
5-6 Green LED	On: 1G/2.5G/10G Link normal Off: Link blocked Flashing: Data transmitting

Product Structure Diagram

