


10-Ports Gigabit Uplink 100M 8-Ports Ethernet Industry Switch



www.hrgdkj.com

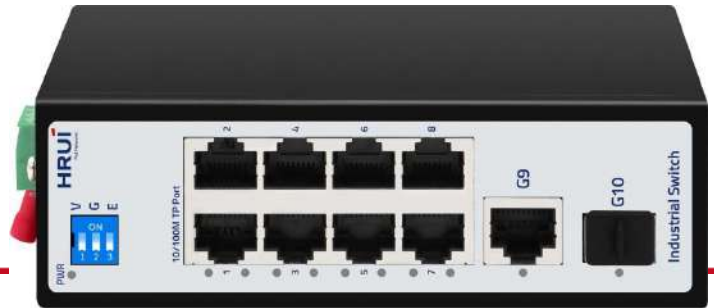

10-Ports Gigabit Uplink 100M 8-ports Ethernet Industry Switch, can support 8* 100M RJ45 Ports+1* Gigabit Uplink Ports+1* SFP Ports. Support DIN-Rail & Wall mounts, support double power supply input (DC12-55V), working temperature -40°C~+75°C, It has passed the industrial environment certification and complies with FCC,CE,CCC,RoHS standards. The reliable industrial design can ensure that your automation system runs without interruption and stability. This series of industrial switches can be widely used in wind, electricity, assembly automation, subway PIS, power SCADA, sewage treatment, metallurgy, intelligent transportation, rail transportation, military and other industries, is a green low power industrial Ethernet switch.

Main feature

- IP40 protect grade, high strength iron shell, DIN35 Rail installation
- Industrial grade 4 design, -40 to 85°C working temperature
- Support redundant power supply access, support anti-reverse connection
- Support VLAN, Extend, standard switch dial function
- Support port Surge Protection: Common mode 6KV, Differential mode 2KV; ESD 15KV, Contact 8KV

Application Environment

Metro Optical Fiber Broadband Network:

Metro Optical Broadband Network: Data network operators such as telecommunications, cable TV, and network system integration, etc.

Broadband Network:

Broadband private network: suitable for financial, government, oil, railway, electric power, public security, transportation, education and other industries.

Multimedia transmission:

Multimedia transmission: integrated transmission of images, voice and data, suitable for remote teaching, conference TV, videophone and other applications

Real time monitoring:

Real-time monitoring: simultaneous transmission of real-time control signals, images and data

Resistant to harsh environments:

5. Resistant to harsh environments: suitable for networking in harsh environments with strong electromagnetic interference and long distances

Technical Parameter	
Input/Output interface	
Power	DC 12 ~ 55V
Ethernet	8 100M RJ45 Port 1 Gigabit Uplink Ports 1 Gigabit SFP Ports
Performance	
Bandwidth	5.6Gbps
Package Forwarding Rate	4.166Mpps
MAC Address	1K
Jumbo frame	9.6Kbytes
Forwarding mode	Store and forward
MTBF	100000 小时
Standard	
Network Protocols	IEEE802.3 IEEE802.3u IEEE802.3z
Industry Standard	EMI: FCC Part 15, CISPR (EN55022) class A EMS: EN61000-4-2 (ESD) EN61000-4-4 (EFT) EN61000-4-5 (Surge)
Network Media	10BASE-T: Cat5 or more UTP(≤100 m) 100BASE-TX: Cat5 or more UTP(≤100 m) 1000BASE-TX: Cat5 or more UTP(≤100 m)
Fiber Media	Multi-mode: 850nm, 1310nm. transmission distance: 550m/2Km Single-mode: 1310nm, 1550nm. transmission distance: 20/40/60/80/100/120Km
Certification	
Safety Certificate	CE、FCC、RoHS

Environmental standards	
Working Environment	Operating Temperature: -40 ~ 75°C Storage Temperature: -40 ~ 85°C Humidity: 5%~95 %(non-condensing)
Physical Specifications	
Specification Size	Product Size: 138×108×44 mm Packing Size: 245×190×60mm Product net weight: 0.567KG Product gross weight: 0.701 KG (excluding power supply)
Packing Info	Outer box size: 520×320×400mm Packing quantity: 20 PCS Packing weight: 15.02KG
Voltage	Voltage input: DC12 ~ 55V Power wiring: 4 PIN industrial terminals (redundant V1+V1-, V2+V2-) / DC 2.1 (DC 2.1 cannot be used together with V1 and V2)
Packing List	1. Industrial switch: 1 2. Instructions: 1PCS 3. Qualification certificate, warranty card 1PCS 4. Mounting ears: 1 pair
Function indication	
LED Indicator	PWR, 1-8 Green, G10
PWR	Lighting: Powered Un-Light: No Power
1-8 Green	Blinking slowly: 10/100 links are normal Off: link failure Flash: link data transfer
G10	Steady on: The optical fiber connection is normal No light: no fiber connection Flash: link data transfer
DIP Function	V,G,E (Open Up, Close Down)
V	V: VLAN mode, ports 1-8 are isolated, and both communicate with ports 9 and 10
G	G: Normal mode
E	E: In extension mode, ports 1-8 are reduced to 10M and can be extended to 250 meters

Order Info

HR500-SW10811GS	10-Ports Gigabit Uplink 100M 8-ports Ethernet Industry Switch
-----------------	---

Product Picture



Product Structure

