

**DS-PDC5NC-EG2****Wired Nano PIR Curtain Detector**

Nano Curtain is a small & compact detector featuring a solid curtain coverage up to 5m width by 4m height when ceiling installed, it is suitable for entry/exit protection by setting up detection "curtain" walls or windows.

- Slim design for window frame installation
- Automatic sensitivity
- Directional detection support




## ▪ Specification

| Model                      |                                  | DS-PDC5NC-EG2                     |
|----------------------------|----------------------------------|-----------------------------------|
| Detection Performance      | Detection Method                 | Passive Infrared                  |
|                            | Detection Range                  | 5 m                               |
|                            | Detection Angle                  | 5°                                |
|                            | Detection Zones                  | 28                                |
|                            | Detectable Speed                 | 0.3~2 m/s                         |
|                            | Sensitivity                      | Auto                              |
|                            | White Light Filter               | 6500 lux                          |
|                            | Digital Temperature Compensation | Support                           |
|                            | Creep Zone Protection            | Support                           |
|                            | Digital Processing               | Support                           |
| Feature                    | Tamper Protection                | Front                             |
|                            | Directional Detection            | Support                           |
|                            | Alarm Output                     | Normally Closed                   |
| Interface                  | LED Indicator                    | Blue(Alarm)                       |
|                            | Transmission Method              | Wired                             |
| Electrical Characteristics | Power Consumption                | 15 mA Max                         |
|                            | Power Supply                     | 9 to 16 VDC                       |
|                            | Typical Voltage                  | 12 VDC                            |
| General                    | Operation Temperature            | -10 °C to 55 °C (14 °F to 131 °F) |
|                            | Storage Temperature              | -20 °C to 60 °C (-4 °F to 140 °F) |
|                            | Operation Humidity               | 10% to 90%                        |
|                            | Dimension(WxHxD)                 | 29.7 mm × 78.1 mm × 24.8 mm       |
|                            | Weight                           | 31.5 g                            |
|                            | Mounting Height                  | 2.4 to 4 m                        |
|                            | Mounting Method                  | Ceiling                           |
|                            | Application Scenario             | Indoor                            |

## ▪ Available Model

DS-PDC5NC-EG2

## ▪ Detection Method

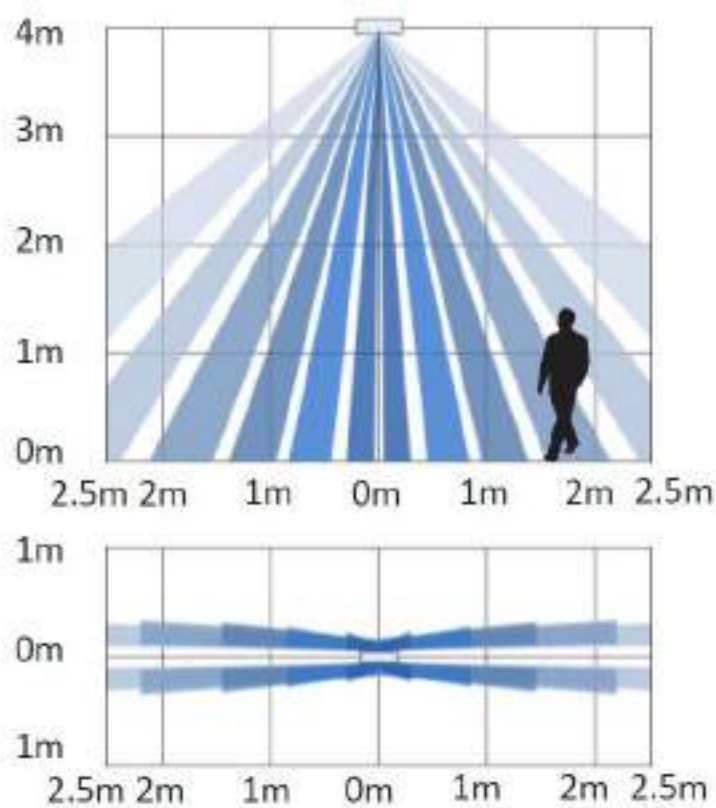

Distributed by



## HIKVISION

### Headquarters

No.555 Qianmo Road, Binjiang District,  
Hangzhou 310051, China  
T +86-571-8907-5998  
overseasbusiness@hikvision.com

**Hikvision USA**  
T +1-909-895-0900  
sales.usa@hikvision.com

**Hikvision Australia**  
T +61-2-8589-4211  
sales.au@hikvision.com

**Hikvision India**  
T +91-22-28409800  
sales@premierhikvision.com

**Hikvision Canada**  
T +1-866-200-8660  
sales.canada@hikvision.com

**Hikvision Thailand**  
T +662-271-9949  
sales.thailand@hikvision.com

**Hikvision Europe**  
T +31-23-5542770  
sales.eu@hikvision.com

**Hikvision Italy**  
T +39-0438-6802  
info.it@hikvision.com

**Hikvision Brazil**  
T +55-11-3318-0060  
latam.support@hikvision.com

**Hikvision Turkey**  
T +90-2125521 7070- 7074  
sales.tr@hikvision.com

**Hikvision Malaysia**  
T +601-7652-2413  
sales.my@hikvision.com

**Hikvision UK & Ireland**  
T +01526-802140  
sales.uk@hikvision.com

**Hikvision South Africa**  
Tel: +27 106 0351172  
sale.africa@hikvision.com

**Hikvision France**  
T +33011-86-330-460  
info.fr@hikvision.com

**Hikvision Kazakhstan**  
T +7-727-9730067  
nikis.pantlov@hikvision.ru

**Hikvision Vietnam**  
T +84-974270888  
sales.vt@hikvision.com

**Hikvision UAE**  
T +971-4-4452080  
sales.me@hikvision.com

**Hikvision Singapore**  
T +65-6884-4718  
sg@hikvision.com

**Hikvision Spain**  
T +34-91-737-16-55  
info.es@hikvision.com

**Hikvision Tashkent**  
T +99-67-1238-9430  
uzb@hikvision.ru

**Hikvision Hong Kong**  
T +852-2151-1761  
info.hk@hikvision.com

**Hikvision Russia**  
T +7-495-859-87-99  
sales.ru@hikvision.com

**Hikvision Korea**  
T +82-1031-731-8817  
sales.korea@hikvision.com

**Hikvision Poland**  
T +48-22-460-01-50  
info.pl@hikvision.com

**Hikvision Indonesia**  
T +62-21-2933759  
Sales.indonesia@hikvision.com

**Hikvision Colombia**  
sales.colombia@hikvision.com