

iDS-7208HUHI-M2/S TURBO ACUSENSE DVR

Key Feature

- Deep learning-based motion detection 2.0 for all analog channels
- Deep learning-based perimeter protection
- H.265 Pro+/H.265 Pro/H.265/H.264+/H.264 video compression
- HDTVI/AHD/CVI/CVBS/IP video inputs
- Audio via coaxial cable
- Up to 16-ch IP camera inputs (up to 8 MP)
- Up to 10 TB capacity per HDD



Compression and Recording

- H.265 Pro+ video compression improves encoding efficiency, and reduces data storage costs
- Recording at up to 8 MP resolution

Storage and Playback

- 2 SATA interfaces
- Smart search for efficient playback

Smart Function

- Deep learning-based motion detection, and perimeter protection (line crossing and intrusion detection)
- Support multiple VCA (Video Content Analytics) events for both analog and smart IP cameras

Network & Ethernet Access

- Compatible with major Wi-Fi dongle products in the market
- Hik-Connect & DDNS (Dynamic Domain Name System) for easy network management
- Output bandwidth limit configurable



www.hikvision.com

▪ Specification

| Motion Detection 2.0 | |
|------------------------------|--|
| Human/Vehicle Analysis | Deep learning-based motion detection 2.0 is enabled by default for all analog channels, it can classify human and vehicle, and extremely reduce false alarms caused by objects like leaves and lights; Quick search by object or event type is supported; |
| Perimeter Protection | |
| Human/Vehicle Analysis | Up to 4-ch |
| Facial Detection | |
| Facial Detection and Capture | Face picture detection, face picture search |
| Recording | |
| Video Compression | H.265 Pro+/H.265 Pro/H.265/H.264+/H.264 |
| Encoding Resolution | 8 MP/5 MP/3K/4 MP/3 MP/1080p/720p/WD1/4CIF/VGA/CIF |
| Frame Rate | Main stream: 8 MP@8 fps/3K@12 fps/5 MP@12 fps/4 MP@15 fps/8 MP Lite@15 fps/3 MP@18 fps 1080p/720p/WD1/4CIF/VGA/CIF@25 fps (P)/30 fps (N) Sub-stream: WD1/4CIF/CIF@25 fps (P)/30 fps (N) |
| Video Bitrate | 32 Kbps to 10 Mbps |
| Dual-stream | Support |
| Stream Type | Video, Video & Audio |
| Audio Compression | G.711u |
| Audio Bitrate | 64 Kbps |
| Video and Audio | |
| IP Video Input | 4-ch (up to 12-ch) Up to 8 MP resolution Enhanced IP mode on: 8-ch (up to 16-ch), each up to 4 Mbps Support H.265+/H.265/H.264+/H.264 IP cameras |
| Analog Video Input | 8-ch;BNC interface (1.0 Vp-p, 75 Ω), supporting coaxitron connection |


| | |
|----------------------------|---|
| HDMI Output | HDMI: 1-ch, 4K (3840 × 2160)/30Hz, 2K (2560 × 1440)/60Hz, 1920 × 1080/60Hz, 1280 × 1024/60Hz, 1280 × 720/60Hz VGA: 1-ch, 1920 × 1080/60Hz, 1280 × 1024/60Hz, 1280 × 720/60Hz HDMI/VGA simultaneous output |
| CVBS Input | PAL/NTSC |
| CVBS Output | 1-ch, BNC (1.0 Vp-p, 75 Ω), resolution: PAL: 704 × 576, NTSC: 704 × 480 |
| Synchronous playback | 8-ch |
| HDTVI Input | 8 MP(3840 × 2160)@15 fps, 8 MP(3840 × 2160)@12 fps, 3K(2960 × 1665)@20 fps, 5 MP(2560 × 1944)@20 fps, 5 MP(2560 × 1944)@12 fps, 4 MP(2560 × 1440)@30 fps, 4 MP(2560 × 1440)@25 fps, 3 MP@18 fps, 1080p@30 fps, 1080p@25 fps, 720p@30 fps, 720p@25 fps |
| AHD Input | 5 MP(2560 × 1944)@20 fps, 5 MP(2560 × 1944)@12 fps, 4 MP(2560 × 1440)@30 fps, 4 MP(2560 × 1440)@25 fps, 1080p@30 fps, 1080p@25 fps, 720p@30 fps, 720p@25 fps |
| HDCVI Input | 8 MP(3840 × 2160)@15 fps, 8 MP(3840 × 2160)@12 fps, 5 MP(2592 × 1944)@20 fps, 4 MP(2560 × 1440)@30 fps, 4 MP(2560 × 1440)@25 fps, 1080p@30 fps, 1080p@25 fps, 720p@30 fps, 720p@25 fps |
| Audio Output | 1-ch, RCA (Linear, 1 KΩ) |
| Audio Input | 1-ch, RCA (2.0 Vp-p, 1 KΩ) |
| Two-Way Audio | 1-ch, RCA (2.0 Vp-p, 1 KΩ) (using the first audio input) |
| Network | |
| Total Bandwidth | 128Mbps |
| Network Protocol | TCP/IP, PPPoE, DHCP, Hik-Connect, DNS, DDNS, NTP, SADP, NFS, iSCSI, UPnP™, HTTPS, ONVIF |
| Remote Connection | 64 |
| Network Interface | 1, RJ45 10M/100M/1000M self-adaptive Ethernet interface |
| Auxiliary Interface | |
| SATA | 2 SATA interface |
| Capacity | Up to 10 TB capacity for each disk |
| Serial Interface | RS-485 (half-duplex) |

| | |
|-----------------------|--|
| USB Interface | 1 × USB 2.0; 1 × USB 3.0 |
| Alarm In/Out | N/A |
| General | |
| Power Supply | 12 VDC |
| Consumption | ≤ 15 W |
| Working Temperature | -10 °C to +55 °C (+14 °F to +131 °F) |
| Working Humidity | 10% to 90% |
| Dimension (W × D × H) | 380 × 320 × 48 mm (15.0 × 12.6 × 1.9 inch) |
| Weight | ≤ 2 kg (4.4 lb) |

Note:


- 1: Motion detection 2.0 and perimeter protection cannot be enabled at the same time. Enable one function will make the other one unavailable.
- 2: Enhanced IP mode might be conflicted with smart events (face picture comparison, motion detection 2.0 and perimeter protection) or other functions, please refer to the user manual for details.
- 3: The number of audio inputs and alarm in/out can be optional. The tag on the package will describe audio input and alarm in/out parameters. For example, “4A+8/4ALM” means your device has 4 audio inputs, 8 alarm inputs and 4 alarm outputs. If your device only has 1 audio input, the tag may not describe it.

Physical Interface

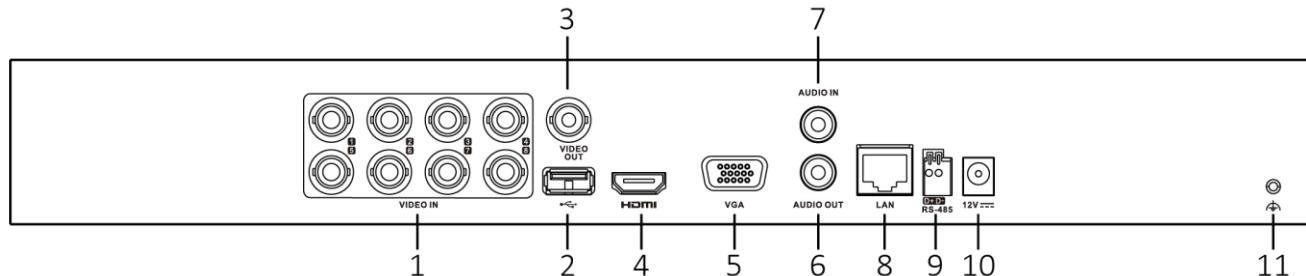

| No. | Description | No. | Description |
|-----|--------------------------|-----|-------------------------|
| 1 | VIDEO IN | 7 | AUDIO IN, RCA connector |
| 2 | USB interface | 8 | LAN network interface |
| 3 | VIDEO OUT | 9 | RS-485 serial interface |
| 4 | HDMI interface | 10 | 12 VDC power input |
| 5 | VGA interface | 11 | GND |
| 6 | AUDIO OUT, RCA connector | | |

Dimension

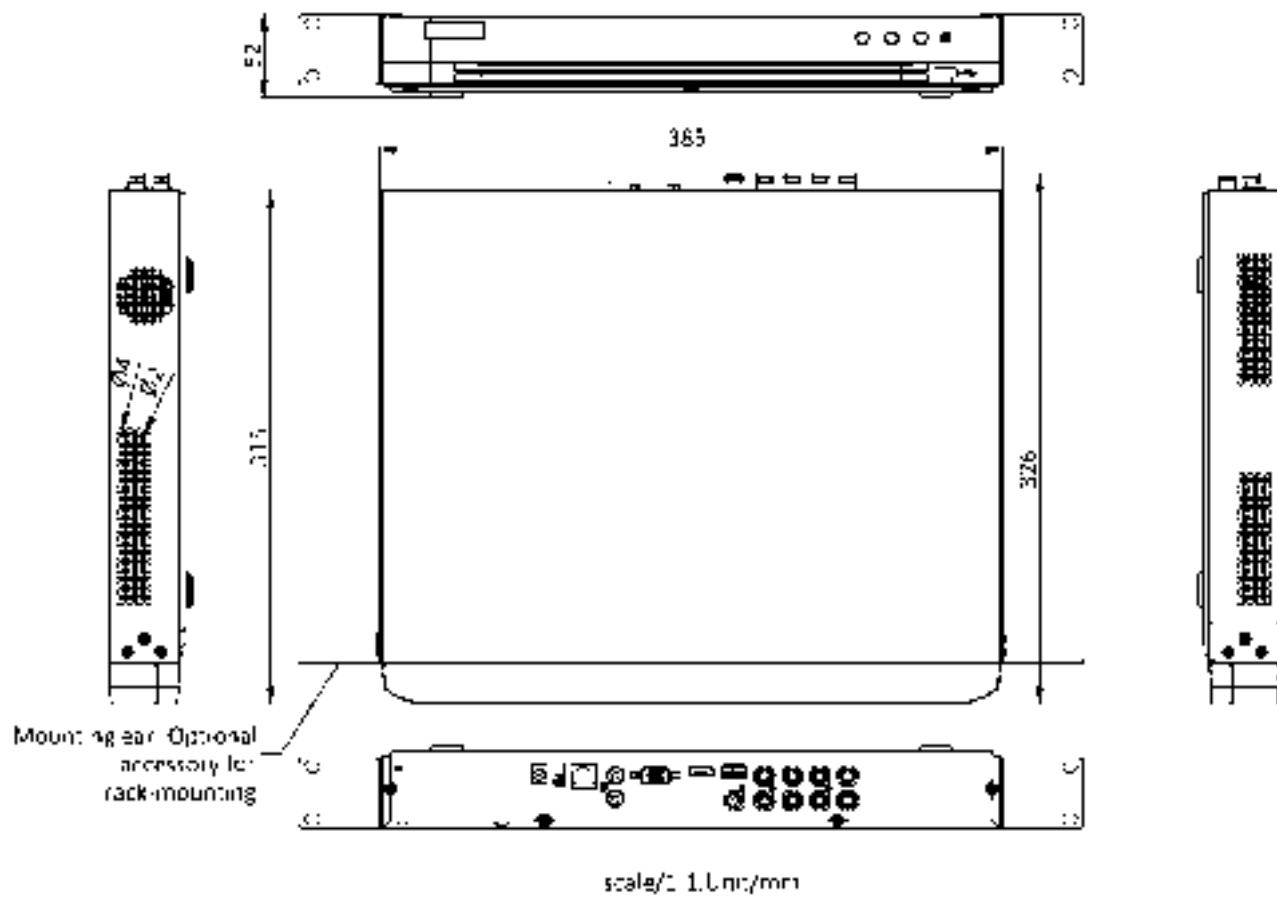

Available Model

iDS-7208HUHI-M2/S

Distributed by



HIKVISION®

Headquarters

No.555 Qianmo Road, Binjiang District,
Hangzhou 310051, China
T +86-571-8807-5098
overseasbusiness@hikvision.com

Hikvision USA
T +1-909-895-0400
sales.usa@hikvision.com

Hikvision Australia
T +61-2-8589-4233
customers@hikvision.com

Hikvision India
T +91-22-28469000
sales.in@pramahikvision.com

Hikvision Canada
T +1-866-703-8830
sales.ca@hikvision.com

Hikvision Thailand
T +662-275-9949
sales.thailand@hikvision.com

Hikvision Europe
T +31-23-5542770
sales.eu@hikvision.com

Hikvision Italy
T +39-0938-6802
info.it@hikvision.com

Hikvision Brazil
T +55 11 3318-0060
latam.support@hikvision.com

Hikvision Turkey
T +90 (216)521 7070-7074
sales.tr@hikvision.com

Hikvision Malaysia
T +601-7652-2413
sales.my@hikvision.com

Hikvision UK & Ireland
T +01628-902140
sales.uk@hikvision.com

Hikvision South Africa
Tel: +27 110 0351172
sat@safica@hikvision.com

Hikvision France
T +33(0)1-85-330-650
info.fr@hikvision.com

Hikvision Kazakhstan
T +7-727-9730067
nikia.panfilov@hikvision.ru

Hikvision Vietnam
T +84-97470888
sales.vt@hikvision.com

Hikvision UAE
T +971-4-4432090
sales.ae@hikvision.com

Hikvision Singapore
T +65-6284-4718
sg@hikvision.com

Hikvision Spain
T +34-91-737-16-56
info.es@hikvision.com

Hikvision Tashkent
T +99-87-1238-9438
uzb@hikvision.ru

Hikvision Hong Kong
T +852-2151-1701
info.hk@hikvision.com

Hikvision Russia
T +7-495-669-67-99
ru@hikvision.com

Hikvision Korea
T +82-10)31-731-8817
korea.korea@hikvision.com

Hikvision Poland
T +48-22-460-01-50
info.pl@hikvision.com

Hikvision Indonesia
T +62-21-2833759
Sales.Indonesia@hikvision.com

Hikvision Colombia
sales.colombia@hikvision.com
04701002011028